

5



4

3

2



1

C

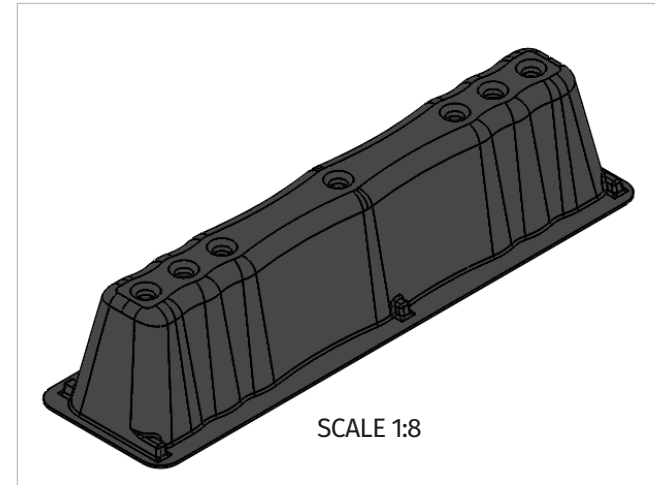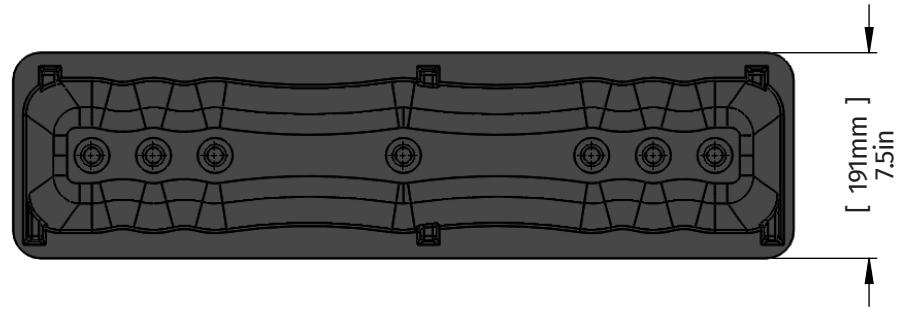

C

B

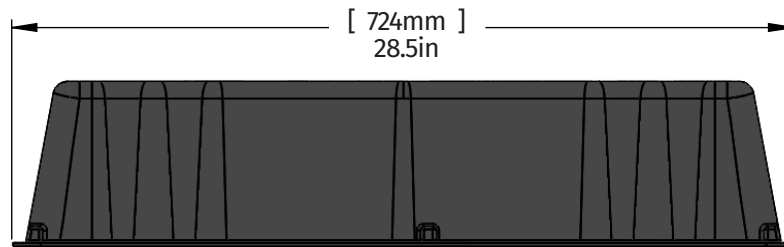

B

NOTES:

- Extreme Temperature Durability (-40°F to 260°F).
- High Tensile Strength.
- Crack/Split/Leak/Rust Resistant.
- Self Extinguishing.
- Made with Pride in the USA.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±.032
ANGULAR: MACH ±5° BEND ±2°
TWO PLACE DECIMAL ±.010
THREE PLACE DECIMAL ±.005

INTERPRET GEOMETRIC
TOLERANCING PER: ANSI Y14.5, 1994

ENGINEERING	NAME	DATE
DRAWN BY ENGINEERING	DS	8/6/09
CHECKED BY ENGINEERING	JK	8/6/09
ENGINEERING APPR.	CC	8/6/09
MFG. APPR.	CC	8/6/09

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
RECTORSEAL.
ANY REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
RECTORSEAL IS PROHIBITED.

R50258-0922



2601 Spenwick Drive
Houston, TX 77055
800-231-3345

TITLE:

AG-GFR 28 x 8 x 6 SPECIFICATION SHEET

ITEM #: 96254

SIZE
A

SCALE: 1:5

SHEET 1 OF 1

A

5

4

3

2

1