

A/C Pan Treatment

Nu Line®

Mighty Pump™

LineShot™

A/C Drain Pump

AC Leak Freeze®

Acid-Away®

Kickstart[®]

Turbo-Kleen™

Drain Guard™

Renewz™

Con-Coil™

Coil-Cure™

Desolv™

Clean-N-Safe™

RectorSeek™

MAINTENANCE

CONDENSATE DRAIN LINE CLEANERS

A/C Pan Treatment

Drain pan & drain line treatment

Code	Description	Qty
68115	200 tablet bottle	12
68117	30 tablet bottle	6

APPLICATION • Prevents drain line and pan blockage in air conditioners, humidifiers and refrigerators due to build up of sludge and slime • 2 tablets per one ton of air conditioning controls odor and sludge

FEATURES

- · Easily dispensed
- Long lasting

RECOMMENDED FOR

• Drain line • Drain pan



Nu Line®

Condensate drain cleaner

Code	Description	Qty
97685	8 oz.	24
97690	32 oz.	12

FEATURES

- · Easily dispensed
- Long lasting
- Enzyme based

APPLICATION • Helps prevent A/C drain line clogs and water leaks by preventing accumulation of slime and keeping drain lines open • Use every three months to help prevent sludge build up

RECOMMENDED FOR

• Drain line • Drain pan



VACUUM OR PUSH-OUT CLOGS IN CONDENSATE DRAIN LINES

Mighty Pump™

Со	de	Description	Qty
977	795	Mighty Pump	4
977	796	Replacement Hoses (Two hoses per bag)	6

FEATURES

- · No nitrogen tank or gas cartridges needed
- 2-way flow w/o backflow
- Lightweight, heavy-duty molded PVC
- · Easy clean up
- High volume, low pressure

Quickly & completely clear blockage

APPLICATION • Hand-operated pump that can be used to vacuum or push-out a clogged drain line from inside or outside the home or building · Generates enough pressure to clear slime, mold & dirt plugs

RECOMMENDED FOR

• Drain Line • A/C condensate pans • Secondary overflow pans • Water heater pans • Tubs & toilets

Includes · Pump body · Flexible hoses · Spring check valves • 3/4" adapter • Spare O-rings







LineShot™

Condensate drain line clearing device



FEATURES

- · Lightweight
- Portable
- Environmentally-Friendly
- · Tapered fitting that is compatible with 3/8" - 3/4" drain openings
- · Flexible hose for easy maneuverability

APPLICATION • Clears drain lines quickly and easily with a burst of CO2 • Includes an end fitting compatible with Schrader valves and a tapered fitting for 3/8" – 3/4" drain openings • Flexible hose is easy to maneuver in tight spaces • Can be used with the Safe-T-Switch SC1, All-Access® AA1 and AA1-FS

RECOMMENDED FOR

Condensate Drain Lines







A/C Drain Pump

Foot-operated device to clear drain line

Code	Description	Qty
83418	A/C Drain Pump	6

FEATURES


- · Fast and easy, clear clogged lines in seconds
- · High pressure output
- Reusable
- Comes complete
- · Durable and tough

APPLICATION · Manual A/C drain line pump • An easy way to remove blockages from A/C condensate drain lines, without the need for electricity · Manual foot-operated pump that can be used to push-out a clogged drain line, generating enough pressure to clear slime, mold & dirt plugs . Compatible with

the cleanout adapter provided All-Access® with AA1 and AA1-FS





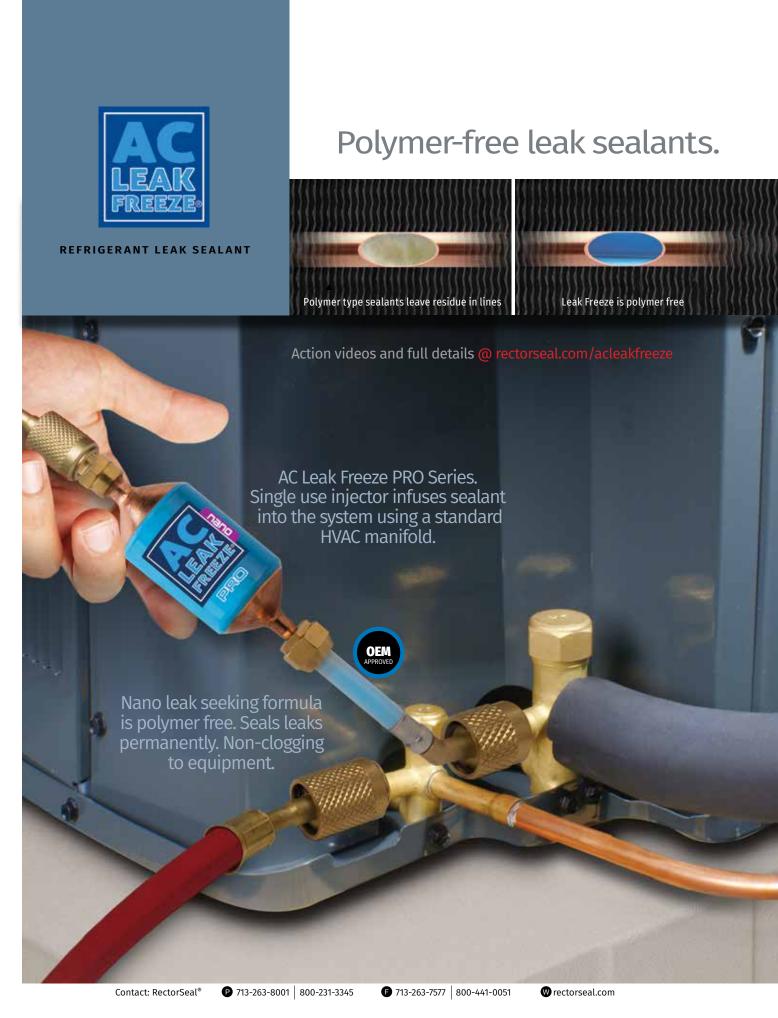

Safely extend HVAC/R system life.



FOUR SEALANT FORMULAS

If there were just one type of refrigerant leak, **AC Leak Freeze would offer** just one leak sealant.

NANO leak sealant formula is reliable, safe and polymer free. Magic Frost adds an anti-friction lubricant to reduce noise/vibration so system runs smoother, more efficient. UV adds the ability for a UV light source to detect larger leaks for system assessment. R-Appliance targets system sizes 4-16 oz.




SEALANT DELIVERY SYSTEMS

PRO Series infusion.

Sealant is infused using standard HVAC Manifold. Recommended for use in both R410A, R22 and A2L systems. PRO series is sold in sizes for both ducted and ductless applications.

Syringe injection.

Sealant is also available in syringe for direct injection by hand. Recommended for use in R22 A/C systems.

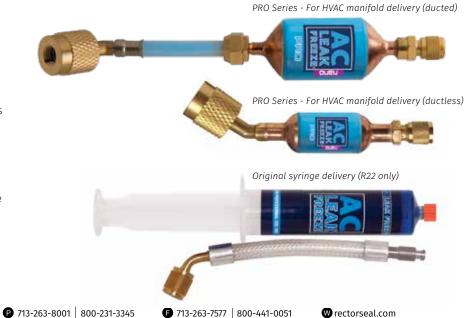



MAINTENANCE SOLUTIONS

AC Leak Freeze® PRO

ı	Code	Description	Qty
	45316	1.46 oz nano	12
	45317	1.46 oz nano Magic Frost	12
	45318	1.46 oz nano UV	12



FEATURES

- Single use disposable
- · Polymer-free nano formula
- · Safe for system
- · Ready to use
- Non-flammable
- Non-Toxic
- POP packaged



WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Leak sealant & system enhancer

APPLICATION • Revitalizes A/C & refrigeration systems by permanently sealing small, hard-to-find micro gas leaks • Infuses into system through standard ¼ in service port using an HVAC Manifold • For use in copper and aluminum coils • Non-clogging to compressors, recovery units, Schrader valves, cap tubes, TXV valves, micro channels, evacuation equipment and gauges • Compatible with all refrigerants • Magic Frost formula enhances system performance by reducing compressor noise and extending compressor life. • UV formula adds the



PRO nano

PRO nano Magic Frost

PRO UV

AC Leak Freeze® PRO

Code	Description	Qty
45309	0.5 oz (15 mL) PRO Mini-split	12
45308	0.5 oz (15 mL) UV Mini-split	12



FEATURES

- Reduced 15 mL content
- Single use disposable
- Polymer-free nano formula
- Safe for system
- · Ready to use
- · Non-flammable
- · POP packaged



WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Mini-split system leak sealant

APPLICATION • Permanently seals small, hard-tofind micro gas leaks • Infuses into system through standard ¼ in service port using an HVAC Manifold

• For use in copper and aluminum coils · Non-clogging nano formula • Compatible with all refrigerants • UV formula adds the ability for a UV light source to detect larger leaks for system assessment



AC Leak Freeze®

Code	Description	Qty
45301	.5 oz R-Appliance	12
45302	.5 oz R-Appliance w/adaptor	12
45311	1.5 oz Leak Freeze	12
45312	1.5 oz Leak Freeze w/adaptor	12
45321	1.5 oz Magic Frost	12
45322	1.5 oz Magic Frost w/adaptor	12



FEATURES

- Single use disposable
- · Polymer free nano formula
- Safe for system
- Ready to use
- · Non-flammable
- Non-Toxic
- POP packaged



WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Leak sealant & system enhancer

APPLICATION • Revitalizes A/C & refrigeration systems by permanently sealing small, hard-to-find micro gas leaks · Infuse by hand into system through

standard ¼ in service port using included adaptor • For use in copper and aluminum coils · Non-clogging to compressors, recovery units, Schrader valves, cap tubes, TXV valves, micro channels, evacuation equipment and gauges • Compatible with all refrigerants • Magic Frost formula enhances system performance by reducing compressor noise and extending compressor life.

• R-Appliance formula is sized specifically for appliances (4-16 oz.)







COMPRESSOR ACID NEUTRALIZERS

Revitalize compressors.




Restore pH balance and A/C performance.

Acid-Away® quickly and safely neutralizes harmful A/C acids - the primary cause of compressor burnout.

Acid-Away provides a unique approach to solving the problem of acid buildup in A/C and refrigeration systems that operate using mineral oil or alkylbenzene type refrigerants. It prevents compressor burnouts by neutralizing acid molecules, unlike other products which coagulate to be caught in the filter drier. For systems with polyol ester lubricants, use Acid-Away® for POE.

Acid-Away for POE provides a unique approach to solving the problem of acid build up in A/C and refrigeration systems that operate using polyol ester lubricants. Recommended by compressor manufacturers and proven to neutralize acid after burnouts.

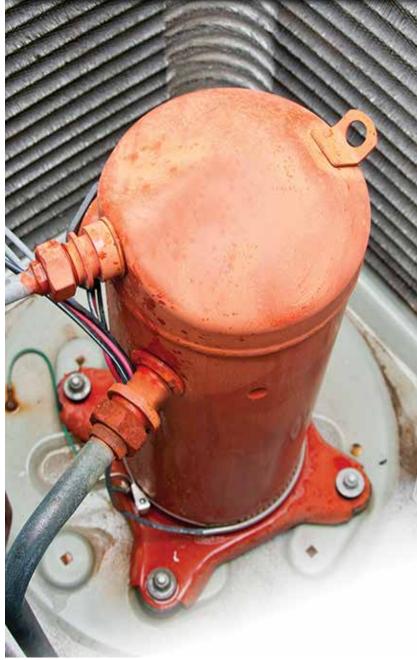

Acid-Away®

Code Description Qty 45004 4 oz. 12



FEATURES

- Stays active in the system to prevent any future acid
- Great for preventive maintenance
- · Safe for system components
- Tested to ANSI/ASHRAE standards 86-1983 & 97-1989
- More effective than competitive neutralizers or scavengers

Compressor burnout acid neutralizer

APPLICATION • Chemical treatment for A/C and refrigeration systems that have experienced a burnout or operating systems that are showing a buildup in acid content • Protects from future burnouts • Neutralizes acid molecules

RECOMMENDED FOR

• Specifically formulated for both hermetic or semi-hermetic compressors that operate with standard CFC or HCFC refrigerants using mineral oil or alkybenzene type refrigeration oils



Acid-Away® for POE

Code	Description	Qty
45009	4 oz.	12



FEATURES

- · Removes residual acid
- Compatible with Polyol Ester lubricants
- Great for preventative maintenance
- Tested to ANSI/ASHRAE standards 86-1983 & 97-1989

Compressor burnout acid neutralizer for POE oils

APPLICATION • Prevents compressor burnouts by removing the acid buildup that can occur in Polyol Ester refrigeration oils used in A/C and refrigeration systems • Neutralizes acid molecules

RECOMMENDED FOR • Specifically formulated for compressors that operate with Polyol Ester oils & is safe for all oils



ACID NEUTRALIZERS

Acid Away® PRO

Compressed burnout acid neutralizer

Code	Description	Qty
45016	1.5 fl. oz. (44 mL)	12

FEATURES

- · Quick & easy to inject
- · Disposable injector
- · Compressor parts safe
- · No harmful effects
- · Can be used with all oils
- Tested to ASHRAE standards 86-1983 & 97-1989 by premier independent testing institute




WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov. APPLICATION • Chemical treatment for use in air conditioning and refrigeration systems that have experienced a burnout, or operating systems that are showing buildup in acid content • Acid-Away PRO quickly circulates throughout the system and chemically neutralizes acids that are always left in air conditioning or refrigeration systems after a burnout occurs • Once neutralized, the acid can no longer continue developing corrosion impeding it from causing another burnout to the system

RECOMMENDED FOR • Air conditioning and refrigeration systems • Safe for all oils • Acid-Away may be used in either hermetic or semi-hermetic compressors that operate with standard CFC or HCFC refrigerants







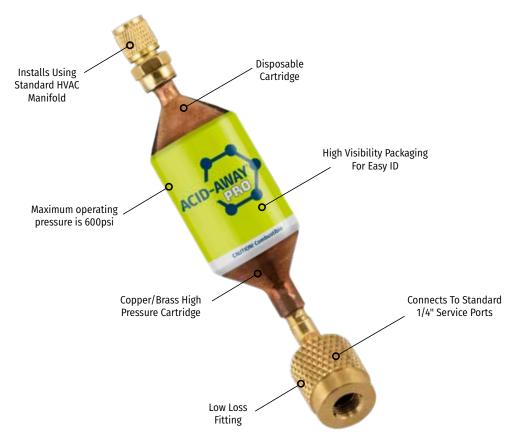



Kickstart®

Code	Description	Qty
96506	KS-1	20
96503	TO-5	20



FEATURES

- 2-wire design for easy installation
- Extend the life of compressors
- OEM tested & approved

Potential relay & start capacitor

APPLICATION • 2-wired starting device that uses a mechanical potential relay & start capacitor • Assists compressors in starting under very adverse conditions such as low voltage or high head pressures extending the life of compressors by bringing them up to full speed more quickly and efficiently



RECOMMENDED FOR

• Single phase 208V, 230V, and 265V A/C, refrigeration and heat pump compressors • KS-1 handles 3.5–5.0 ton maximum torque • TO-5 handles 1.0–3.0 ton maximum torque

Action videos and full details @ rectorseal.com/kickstart





A/C SYSTEM MAINTENANCE

Turbo-Kleen™

Code	Description	Qty
82500	Flush Kit	6
82400	1 pint refill	12
82450	1 gal. refill	4

FEATURES

- Unique combination of chemical cleaning and scrubbing
- Stays active during the entire cleaning process
- Cost effective, reusable system; only buy refills for future jobs

U. S. Patent No. 8,298,345; 8,734,589

Chemically cleans & mechanically scrubs linesets

APPLICATION • Quick and less expensive way to completely clean residual oil and contaminants from A/C line sets
• Scrubbing action cleans more completely than chemicals alone

RECOMMENDED FOR

• Retrofits • Refrigerant conversions • Compressor change-outs

KIT INCLUDES

- Injector nozzle & canister
- Flushing tool
- Plastic connecting line
- 1 pint of chemical solution







A/C SYSTEM MAINTENANCE

Drain Guard™

ı	Code	Description	Qty
	85001	Drain Guard - T Body	12
	85002	Drain Guard - Refill Kit	12

FEATURES

- Keeps condensate drains clean
- Addresses HVAC white slime
- Controls sludge and plugging
- Maintenance free operation for a period of up to six months
- Easy one step refill process

Patent pending

Sludge slime and plugging prevention

APPLICATION • Providing year round control of sludge, plugging and slime protection for HVAC systems*
• Horizontal and vertical air handlers

RECOMMENDED FOR

- HVAC systems
- * 12 months of coverage requires two cartridges






Restore peak A/C efficiency.

COIL CLEANERS







RectorSeal has highly effective, specifically formulated coil cleaners for evaporator and condenser coils.

Each formula powers off years of dirt and buildup to restore performance. Cleaning action infuses deep into coils to dissolve away all hidden grease and dirt. Cleaning can dramatically reduce run time and energy costs. The system will look like new! Cleaners range in strength from max strength acidic and alkaline based to milder formulas for indoor use. Cleaner properties range from max foaming to self-rinsing, liquid and aerosol.





Action videos and full details @ rectorseal.com/coilcleaner



COIL CLEANERS - CONDENSER

Renewz™

Max strength, alkaline based coil cleaner

Code	Description	Qty
82644	1 Gallon (Blue)	4
82649	1 Gallon (Brown)	4



FEATURES

- · High foaming
- Brightening
- Degreasing
- · Biodegradable*
- Concentrated

APPLICATION · CONDENSER COILS Surfactant foaming action lifts all contaminants and grease out of areas of the coil which are normally inaccessible, to where they can be rinsed away with low pressure water. Leaves aluminum surfaces clean and bright in less than five minutes.

RECOMMENDED FOR

- · Condenser coils · Aluminum
- · Cooking grease · Electronic air filters



Con-Coil™

Max strength, acid based coil cleaner

Code	Description	Qty
82651	1 Gallon	4
	FEATURES	
	High foaming	
	Brightening	
	Degreasing	
	Biodegradable*	
	Concentrated	
	 Concentrated 	

APPLICATION · CONDENSER COILS Acid-based foaming brightener and cleaner lifts obstructing contaminants such as bugs, cottonwood, grass, lint, dirt and oxides from coils. Pushes contaminants and grease out of areas of the coil which are normally inaccessible, to where they can be rinsed away with low pressure water. Leaves aluminum surfaces clean in less than five minutes.

RECOMMENDED FOR

· Air cooled condenser coils · Aluminum · Cooking grease • Electronic air filters



Foam-Core[™]

Max foaming, alkaline based coil cleaner

Code	Description	Qty
11050	1 Gallon	4
	FEATURES	
	 High strength 	
	Max foaming	
	• Biodegradable*	
	 Concentrated 	

APPLICATION · CONDENSER COILS Penetrating surfactant foaming action lifts and pushes contaminants and grease out of areas of the coil which are normally inaccessible, to where they can be rinsed away with low pressure water. Leaves aluminum surfaces clean in less than five minutes.

RECOMMENDED FOR

- Condenser coils
- · Aluminum · Cooking grease
- · Electronic air filters



^{*} Contains the best available biodegradable surfactants and detergents.



Coil-Rite™

Mild strength, self-rinsing coil cleaner

COIL CLEANERS - EVAPORATOR

Code	Description	Qty
82612	1 Gallon	4



FEATURES

- Low foaming
- Non-acid
- · Biodegradable*
- Concentrated

APPLICATION • EVAPORATOR COILS Powerful surfactant removes oil, grease and dust. Cleans grease and dirt off of surfaces which are normally inaccessible.

RECOMMENDED FOR

- · Evaporator coils
- Air handling equipment
- Electronic and permanent air filters
- · All mechanical equipment



Coil-Cure[™] Liquid

Self-rinsing liquid disinfectant

	Code	Description	Qty
	11072	Spray Bottle, Quart	12
	11074	Refill, Gallon	4

FEATURES

- EPA Reg. No. 6836-152-51219
- · One step disinfectant cleaner
- · Convenient quart spray bottle
- · Disinfects against a broad spectrum of bacteria
- · Kills coronavirus
- · Effective via AOAC methodology against a wide variety of organisms
- · Controls mold and mildew
- · Cleans and deodorizes

Coronavirus Disease 2019 (COVID-19) is caused by SARS-CoV-2. Coil-Cure, Evaporator Coil Cleaner and Disinfectant, EPA Reg. No. 44446-23-51219, kills similar viruses and therefore can be used against SARS-CoV-2 when used in accordance with the directions for use against Canine Parvovirus on hard, non-porous surfaces. Refer to the CDC website at https://www.cdc.gov/ coronavirus/index.html for additional information.

APPLICATION • EVAPORATOR COILS

Powerful non-abrasive disinfectant cleaner • An EPA registered disinfectant to destroy bacteria, fungi and viruses, making it a safe and effective way to clean coils and drain pans

RECOMMENDED FOR

· For use on porcelain, ceramic tile, fiberglass, formica, urinals, sinks, toilets, shower stalls, walls, floors and counter tops · Areas of use include hospitals and nursing homes, physicians' offices, schools, sports and recreational facilities. offices, airports, beauty shops, janitorial services, retail areas, convenience stores, public areas and many others • Ideal for cleanup of HVAC equipment after natural disasters

Coil-Cure has been added to the EPA list N as an EPA registered disinfectant with emerging viral pathogens AND human coronavirus claims for use against SARS-CoV-2.

EPA Reg. No. 6836-152-51219





Contact: RectorSeal®



EPA APPROVED DISINFECTANT AND COATING



Coil-Cure cleans and disinfects evaporator coils.

Coil-Cure AM protects against mold, mildew and microbial odor.

Coil-Cure AM helps aluminum coils perform like copper coils.

Coronavirus Disease 2019 (COVID-19) is caused by SARS-CoV-2. Coil-Cure, Evaporator Coil Cleaner and Disinfectant, EPA Reg. No. 44446-23-51219, kills similar viruses and therefore can be used against SARS-CoV-2 when used in accordance with the directions for use against Canine Parvovirus on hard, non-porous surfaces. Refer to the CDC website at https://www.cdc.gov/coronavirus/index. html for additional information.

Coil-Cure[™] Aerosol

Self-rinsing aerosol disinfectant

APPLICATION · Non-abrasive, one-step disinfectant cleaner designed specifically for HVAC equipment in homes, nursing homes, institutions, offices, schools, motels and hotels.

RECOMMENDED FOR • Disinfecting and cleaning A/C evaporator coils • HVAC Catchpans • Floors • Walls • Table tops

Coil-Cure has been added to the EPA list N as an EPA registered disinfectant with emerging viral pathogens AND human coronavirus claims for use against SARS-CoV-2.

EPA Reg. No. 44446-23-51219

Code	Description	Qty
11070	18 oz. Aerosol	12

FEATURES

- · EPA registered
- · Disinfects against Canine Parvovirus
- · Disinfects against Legionella pneumophila
- Effective via AOAC methodology against a wide variety of organisms
- · Controls mold and mildew
- · Cleans & deodorizes No rinsing required
- · Cuts grease and grime without scrubbing

Coil-Cure™ AM Aerosol

Spray-Applied antimicrobial coil coating

APPLICATION • Hybrid polymeric aerosol antimicrobial coating designed for high performance in HVAC environments, protecting expensive equipment from mold, fungus and bacterial growth • Colorless (clear) and can be applied over GulfCoat corrosion protection coatings • Embedded with Agion®, is UV resistant (UVA and AVB) and is a one-part solution • Antimicrobial properties become active when moisture is present and conditions are ideal for bacterial growth, leads to longlasting performance

RECOMMENDED FOR • HVAC tubing, internal components and cabinet walls · Hospitals, schools and anywhere else bacteria, mold and fungi are a concern

ı	Code	ode Description	
	72001	12 oz. aerosol	6



- · Powered by Agion, an EPA registered compound
- · Protects from mold and mildew caused by fungal growth
- Prevents microbial odor development on floors and ceilings
- · Extends equipment life
- UV resistant
- POP packaged



F 713-263-7577 | 800-441-0051

W rectorseal.com



COIL CLEANERS - EVAPORATOR

Ductless

Desolv™

High strength mini-split cleaner, no foam

Code	Description	Qty
82561	16 oz. Aerosol only	12
82566	1 Gallon only	4
82560	1 Gal. Kit w/2 funnels bags	1
82562	Single use funnel bags	10

APPLICATION • MINI-SPLIT EVAPORATOR COILS. Deep cleans mini-split A/C evaporator units. Desolv Kit provides wall and floor protection. Kit is reusable. Desolv aerosol, solution and single use replacement funnel bags are also sold separately.

RECOMMENDED FOR

· Indoor mini-split evaporators and blower fan





FEATURES



· High strength

No foaming

Self-rinsing

U.S. Patent No. 6,863,116 Under license from Crossford International LLC





COIL CLEANERS - MULTI PURPOSE

D-Factor™

Ducted

Max degreasing, self-rinsing coil cleaner

Code	Description	Qty
11060	1 Gallon	4
	FEATURES	
	Low foaming	
	• Non-acid	
	 Biodegradable* 	
	 Concentrated 	

Ducted

APPLICATION · CONDENSER/EVAPORATOR COILS Extra strong heavy duty detergentbased formula rapidly removes grime, oil, grease and dust. Cleans grease and dirt off of surfaces which are normally inaccessible.

RECOMMENDED FOR

- Condenser/evaporator coils
- · Air handling equipment · Electronic and permanent air filters · All mechanical equipment



Clean-N-Safe™

Mild strength, self-rinsing coil cleaner

Code	Description	Qty
83785	1 Gallon	4
83780	20 oz. Aerosol	12
	ı	

FEATURES

- Foaming
- · Non-Acid
- · Biodegradable*
- Concentrated (Liquid)

APPLICATION · CONDENSER/ EVAPORATOR COILS Safe, environmentally friendly coil cleaner that effectively cleans and removes soils. Presents little hazard to people, animals, aquatic life and vegetation. Will not chemically attack coils, surrounding metal, other components or roofing materials.

RECOMMENDED FOR

- Condenser/evaporator coils
- Refrigeration Heat pump coils • Microchannel coils



K.O. Dirt Blaster™

Max degreasing, multi-purpose solvent based cleaner

Code	Description	Qty
88438	20 oz. Aerosol	12
	FEATURES	
	High strength	
	No foaming	
	Self-rinsing	
	High pressure stream	
	warning: This product can expose you to chemicals including Methlyene Chloride, which is known to the of California to cause cancer. For more information, g	State

www.P65Warnings.ca.gov.

NOT FOR SALE OR USE IN STATE OF CALIFORNIA

* Contains the best available biodegradable surfactants and detergents.

APPLICATION · MULTI-PURPOSE

F 713-263-7577 | 800-441-0051

Versatile solvent quickly dissolves grease and oil on all types of surfaces and equipment.

RECOMMENDED FOR

- Small condenser coils Oil burner surfaces
- Machine parts Electrical switches Relays
- · Circuit breakers · Motors · Compressors



COIL CLEANER SELECTOR GUIDE

The right cleaner for every application.

*Contains the best available biodegradable surfactants and detergents.



EQUIPMENT Condenser Condenser and Evaporator

	CON-COIL	RENEWZ BLUE	RENEWZ BROWN	FOAM-CORE	D-FACTOR
	Max strength High foam Brightening Acid base	Max strength High foam Alkaline base	Max strength High foam Alkaline base	High strength Max foam Alkaline base	High strength cleaner. Max degreasing action
PROPERTIES					
Cleaning Strength	Max	Max	Max	High	High
Foaming	High	High	High	Max	Low
Brightening	•	•	•	•	
Degreasing	•	•	•		Max
Disinfectant					
Microchannel Coils					
Self-rinsing					•
Biodegradable*	•	•	•	•	•
EPA Registered					
NSF Nonfood Registered		•	•		
DILUTION RATIO					
Heavy Dirt	1:3	1:3	1:3	1:3	1:4
Medium Dirt	1:6	1:6	1:6	1:6	1:6
Light Dirt/Maintenance	1:9	1:9	1:9	1:9	1:8
PRODUCT CODE					
1 Gallon	82651	82644	82649	11050	11060
Aerosol					


1 Quart

Desolv Kit

Desolv Kit Bags



A CSW Industrials Company

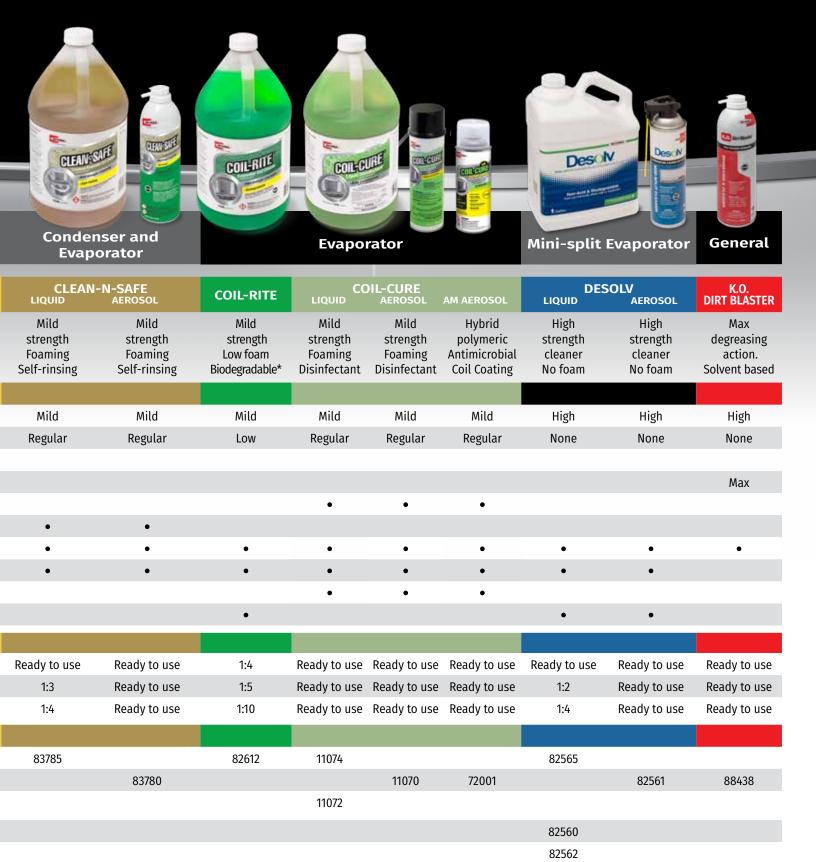



CLEANERS & TREATMENTS


Foam-A-Coil™

Code	Description	Qty
82632	1 gal.	4
82640	12 oz. aerosol	12

FEATURES

Non-acid







WARNING: This product can expose you to chemicals including Diethanolamine, which is known to State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Foaming condenser & evaporator coil cleaner

APPLICATION • EVAPORATOR AND CONDENSER COILS • Foaming biodegradeable* cleaner and degreaser • Lifts grime and oil from normally inaccessible places

RECOMMENDED FOR

- Air conditioning and air handling equipment
- · Electronic & permanent air filters
- · Microchannel coils



Nickel Safe

Code	Description	Qty
88312	16 oz.	12
88314	1 gal.	4

FEATURES

- · Assures clean, fresh-tasting ice
- · Safe for nickel-plated surfaces
- Meets Manitowoc Spec GES-6

Ice machine Cleaner

APPLICATION • Removes scale, muck and slime which can cause bad taste and foul odors · Acid cleaner opens constricted water

RECOMMENDED FOR

• Metal & plastic surfaces



134

^{*} Contains the best available biodegradable surfactants and detergents.





Better Bubble™

Code	Description	Qty
65554	8 oz dauber top	12
65432	32 oz trigger spray	12
65273	1 gal.	4

FEATURES

- · Fast acting
- · Long lasting
- Easy to see bubbles
- · Continuous bubbling

Gas leak locator

APPLICATION • Thick formula pinpoints the smallest natural gas, LPG and A/C refrigerant leaks with well defined elastic bubbles that stand up under pressure and windy conditions • Use on surface temperatures from 20°F to 250°F

RECOMMENDED FOR • All types of pipe, tubing, valves, tanks, pressure vessels, condenser / evaporator coils, refrigeration coils, and many other similar applications



RectorSeek[™] Low-Temp

Code	Description	Qty
61273	1 gal.	4

FEATURES

- · Longer bubbling action
- Spray application
- · Easy to apply

Low temperature leak locator

APPLICATION • Leak locator for use on pipes or tanks containing gases at low temperatures • Effective from -35°F to 200°F

RECOMMENDED FOR • All types of pipe (except CPVC), tubing, valves, cylinders, tanks, pressure vessels, condenser / evaporator coils, refrigeration coils and many other similar applications



RectorSeek[™] Mid-Temp

Code	Description	Qty
60273	1 gal.	4

FEATURES

- · Longer bubbling action
- · Spray application
- · Easy to apply

Mid temperature leak locator

APPLICATION • Leak locator for use at normal temperature on pipe or tanks that contain gases • Can be used on oxygen, air or gas at temperatures between 40°F to 200°F

RECOMMENDED FOR • All types of pipe, tubing, valves, cylinders, tanks, pressure vessels, condenser / evaporator coils, refrigeration coils and many other similar applications





HEATING

Odorgon™

Sootspray™

Surgemaster

8-Way[™]

Surgex™

Zipp™

 $\mathsf{Grime}\text{-}\mathsf{Solv}^{\scriptscriptstyle\mathsf{TM}}$

Lets-Go™

Cold Galvanizing

Buz-Awf™

Draft-Block™

EP-200 & 400

Magne-Patch™

Duct Seal



HEATING CHEMICALS

Performance. Efficiency. Protection.











FUEL OIL DEODORIZERS & ABSORBENTS

Odorgon[™] Powder

Code	Description	Qty
68512	1 lb.	12
68514	2 lbs.	12

FEATURES

- · Leaves pleasant scent
- Non-explosive / non-flammable

Kills odors and absorbs oil

APPLICATION • Handy for cleaning up after fuel oil spills and leaks • Sifter top for controlled economical usage and clean storage

RECOMMENDED FOR

• Eliminating fuel oil odor and stains on floors and horizontal surfaces





Odorgon[™]Spray

Code	Description	Qty
68516	14 oz. aerosol	12

FEATURES

- Non-lingering, mild scent
- · Non-flammable

WARNING: This product can expose you to chemicals including Methyl Isobutyl Ketone (MIBK), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www. P65Warnings.ca.gov.

Kills odors and absorbs oil

APPLICATION · Kills fuel oil odor in hard to reach corners and vertical surfaces

RECOMMENDED FOR

· Neutralizing fuel oil odor remaining after leak or spill cleanup



P 713-263-8001 | 800-231-3345

F 713-263-7577 | 800-441-0051

W rectorseal.com



SOOT REMOVERS

Sootspray[™]

Code	Description	Qty
68342	14 oz. aerosol	12
	• Contains no lead • Cuts vacuum time by	50-100%

The original aerosol soot remover

APPLICATION • Prevents insulating soot from forming • Continuous safe catalytic action keeps burner surface soot free · Improve burner efficiency · Reaches where vacuum cleaners cannot

RECOMMENDED FOR

• Oil & gas-fired burners



BOILER TREATMENTS

Water treatments & sealants for steam and hot water systems

Surgemaster™

Code	Description	Qty
68742	5.3 oz.	12
	1	

FEATURES

- · Will not damage seals and gaskets
- · Inhibits corrosion
- · No petroleum distillates
- · Sure-cure color indicator



WARNING: This product can expose you to chemicals including Silica, which is known to the State of California to cause cancer. For more information, go to www. P65Warnings.ca.gov.

Boiler water treatment

APPLICATION • Prevents priming and surging in steam heating systems Precipitates impurities and promotes efficiency • Sure-cure color indicator

tints boiler water to take the guesswork out of treatment dosage

· Pour into boiler access point.

RECOMMENDED FOR

· Steam heating systems







BOILER TREATMENTS

Water treatments & sealants for steam and hot water systems

8-Way[™]

Water treatment for steam & hot water systems

Code	Description	Qty
68712	1 qt.	12
68714	1 gal.	4

FEATURES

- · Will not damage seals and gaskets
- · Non-chromate; biodegradable*
- · No petroleum distillates
- · Sure-cure color indicator
- * Contains the best available biodegradable surfactants and detergents.

APPLICATION • Builds alkalinity • Controls pH • Removes sludge • Removes rust scale • Inhibits boiler corrosion • Inhibits steam line corrosion • Prevents oxygen pitting • Inhibits lime scale • Prevents surging and foaming · Sure-cure color indicator tints boiler water to take the guesswork out of treatment dosage · Pour directly into boiler or pump into drain valve using force pump.



 Protective maintenance for steam and hot water systems.





▲ Force pump drain line injection

Surgex™

Inhibits scale and corrosion

Code	Description	Qty
68752	1-½ oz.	20

FEATURES

- · Economical
- Concentrated
- · Sure-cure color indicator

APPLICATION • Stops active surging in steam and hot water boilers. Sure-cure color indicator tints boiler water to take the guesswork out of

treatment dosage • Pour into boiler access point.

RECOMMENDED FOR

Steam and hot water systems





Zipp™

Code Description 82642 14 oz. aerosol 12 FEATURES

- · Cleaner / degreaser
- · Leaves no residue
- · Non-flammable
- · Non-conductive



WARNING: This product can expose you to chemicals including Perchloroethylene and Methylene Chloride, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov.

NOT FOR SALE OR USE IN STATE OF CALIFORNIA

Quick drying degreaser

APPLICATION • Quick drying, safety solvent degreaser that instantly removes grease, oil, waxes, tar, gums, grime, dirt, carbon, greasy stains and similar soils from most hard surfaces • Will not short out electrical equipment

RECOMMENDED FOR USE • Oil burner parts · Compressors · Refrigeration units · Greasy fan blades • Strainers • Engines • Stoves • Relay contact points • Electrical equipment



Zipp™II

Code	Description	Qty
82645	12 oz. aerosol	12
	FEATURES	

- · Cleaner / degreaser
- · Leaves no residue
- · Non-flammable
- · Non-conductive
- · Non-chlorinated



WARNING: This product can expose you to chemicals including 1-Bromopropane, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Non-chlorinated quick drying degreaser

APPLICATION • Quick drying, safety solvent degreaser that instantly removes grease, oil, waxes, tar, gums, grime, dirt, carbon, greasy stains and similar soils from most hard surfaces

· Will not short out electrical equipment

RECOMMENDED FOR USE • Oil burner parts · Compressors · Refrigeration units · Greasy fan blades · Strainers · Engines · Stoves · Relay contact points • Electrical equipment



Grime-Solv™

Code	Description	Qty
88436	14 oz. aerosol	12

FEATURES

- Safe for metals
- · Wipes clean or rinses with water
- · Non-flammable



WARNING: This product can expose you to chemicals including Perchloroethylene and Methylene Chloride, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov.

NOT FOR SALE OR USE IN STATE OF CALIFORNIA

Foaming, heavy duty cleaner and degreaser

APPLICATION • Lifts encrusted grime, grease or carbon • Use to remove stains from concrete driveways and brick walls, to clean white wall tires and for cleaning surfaces before painting

RECOMMENDED FOR • Oil burning • A/C and refrigeration equipment • Marine and automotive engines · Machinery that can be rinsed with water or wiped with a rag



Contact: RectorSeal®

F 713-263-7577 | 800-441-0051

W rectorseal.com



SPECIALTY AEROSOLS

Lets-Go™

Description 73012 12 oz. aerosol 12 FEATURES · Loosens frozen bolts, nuts & joints

· Protects from water & weather

· Corrosion inhibitor

Penetrant, lubricant and freeze-up preventer

APPLICATION · Covers metal surfaces with a clinging, tough, long-lasting film of lubricant · The wetting power acts quickly on rusted and seized parts · Displaces moisture from wiring and equipment



Cold Galvanizing Spray

Code	Description	Qty
86625	16 oz. aerosol	12
	• Stops rust and corrosion • Indoors or outdoors	
	WARNING: This product can expose you to Toli	uene, which

is known to the State of California to cause birth defects or other reproductive harm. For more information, go to www. P65Warnings.ca.gov.

Protection of hot-dip galvanizing

APPLICATION · Contains 95% pure zinc and forms a tough, durable and flexible zinc metal coating that bonds electrochemically with the base metal to protect against rust and corrosion • To prevent and retard rust and corrosion on welded joints, fencing, storage tanks, pipe lines, metal buildings, marine and other similar applications



Buz-Awf™

Code	Description	Qty
84391	12 oz. aerosol	12
	1	

FEATURES

- · High pressure spray
- · Shoots 20 ft stream
- Non-conductive up to 47kV

Wasp and hornet spray

APPLICATION • Kills wasps, hornets and yellow jackets • E.P.A. REG. NO. 3862-174-51219









EXPANDING POLYURETHANE FOAM

Draft-Block[™] Orange

Code Description Qty 96495 12 oz. aerosol 12



FEATURES

- · Identifiable orange color
- Expands 3X
- Tack-free in approx. 45 min.
- No urea or formaldehyde
- · Completely dielectric
- UL Evaluation Report ER40378-01
- · Meets ASTM E84
- Meets ASTM E814 (Modified)



Expanding polyurethane foam for utility penetrations

APPLICATION • Draft-Block Orange has a recognized orange color allowing inspectors to identify the use of an approved fireblock product for Type V residential construction. · Blocks flames and smoke in concealed penetrations, preventing flame spread from room to room and floor to floor, with the foam's

RECOMMENDED FOR • Type V residential construction • Excellent filler which bonds and insulates Filling voids, cracks, crevices and small cavities on flat or irregular surfaces · Reducing sound transmission

expansion characteristics.



Draft-Block™

Code	Description	Qty
96500	12 oz. aerosol	12



FEATURES

- Expands 3X
- Tack-free in approx. 45 min.
- No urea or formaldehyde
- UL Evaluation Report ER40378-01
- Meets ASTM E84
- Meets ASTM E814 (Modified)



General purpose expanding polyurethane foam

APPLICATION • Excellent filler which bonds and insulates • Fill voids, cracks, crevices and small cavities on flat or irregular surfaces

- · Reduces sound transmission
- · Completely dielectric



EP-200 & 400

Code	Description	Qty
97600	2 oz. EP-200 with display	24
97601	2 oz. EP-200 refill	24
97602	2 oz. EP-200 on blister card	12
97606	4 oz. EP-400 boxed	12



FEATURES

- · Mixes like putty
- · Hardens in minutes
- Can be drilled, tapped, filed, machined, sanded and painted

Epoxy putty

APPLICATION • Pre-measured, high-grade epoxy and hardener formulated together in one stick

- · Break off the amount needed for each repair
- · Bonds to most surfaces

RECOMMENDED FOR • Bonding and filling metals and a variety of other materials



97602 blister card ▶



Magne-Patch™

Code	Description	Qty
68442	Blister card	12

FEATURES

- · Provides temporary repair
- · Saves time
- Helps avoid serious spills

Instantly stops small leaks in steel tanks

APPLICATION • A powerful, permanent magnet holds a flexible plug against the hole and against existing pressure

- Quickest tank repair available Reusable
- Blister packed

RECOMMENDED FOR • For steel tanks holding oil, gasoline, water, and chemicals



blister card ▶



Duct Seal

Code	Description	Qty
81880	1 lb.	10
81881	5 lbs.	2



FEATURES

- · Asbestos free
- Air / water tight seal
- · Resistant to water, alcohols, mild acids & bases
- · Non-corrosive / nonirritant
- Paintable

Gray putty compound

APPLICATION • Permanently soft, non-toxic, putty-type compound which adheres to most clean, dry surfaces • Can be hand applied from 25°F to 120°F

RECOMMENDED FOR • Sealing around the ends of electrical conduits and boxes

• Flashings • Service mast entries



Contact: RectorSeal®

P 713-263-8001 | 800-231-3345

F 713-263-7577 | 800-441-0051

W rectorseal.com